


Grandview®

Manual Instruction
for Table-Top Screen

U-WORK

Grandview®

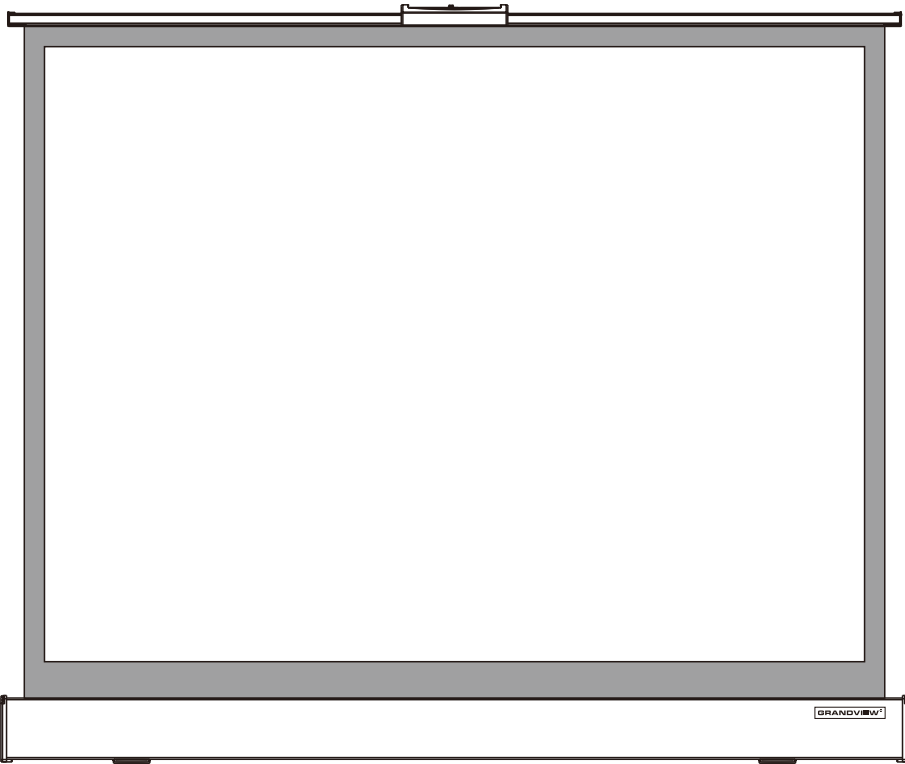

Guangzhou Grandview Creative Technology Co., Ltd
Add: No.1 Building of No.43 South International Trade Avenue, HualongTown,
Panyu District, Guangzhou China.
Tel: +8620-8489-9499 Fax: +8620-8480-5299
Web: www.grandviewscreen.com




Model: PT-Uxx

Thank you for purchasing a Grandview projection screen.
Before use, please read instructions carefully. After installation, keep instructions for future reference.

Specifications

Format	Model	Specification (In)	Viewing area		Screen dimension		Screen Black Border		Net weight (kg)
			W (mm)	H (mm)	L (mm)	A (mm)	B2 (mm)	B3 (mm)	
4:3	PT-U50	50	1016	762	1124	900	20	20	2.8
4:3	PT-U60	60	1219	914	1327	1080	35	20	3.2
16:9	PT-U46	46	1016	571	1124	900	210	20	2.8
16:9	PT-U55	55	1219	685	1327	1080	264	20	3.2
16:10	PT-U47	47	1016	635	1124	900	147	20	2.8
16:10	PT-U56	56	1219	762	1327	1080	187	20	3.2

Note: Sizes and specifications are subject to change at any time. Refer to actual product for exact measurements. The tolerance for L is ± 5mm.

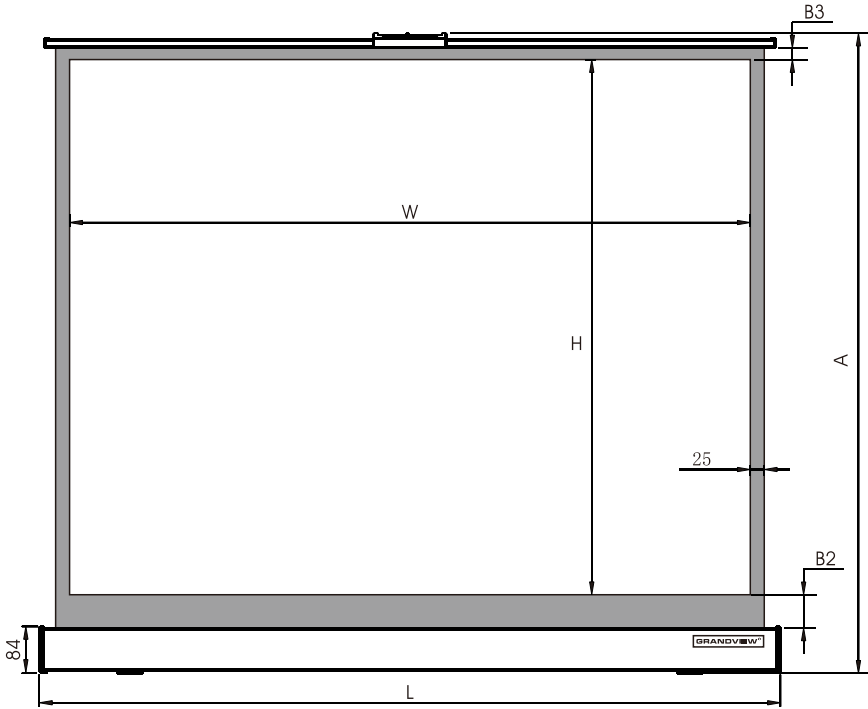

Note


The surface of the screen is designed for optimal performance when properly maintained. Any damage to the surface will affect image quality.

Caution

- Please do not shake the screen.




Do not



- Please do not use any chemicals or cleaning agents to clean the screen. The chemical agents and corrosive elements may cause unevenness on the projection coating.




Do not



- Please do not mark the screen surface.




Do not



- Please do not pull or retract the screen with too much force.



Do not




Maintenance

- If the screen needs to be cleaned, please use a dry-cloth or soft duster and clean gently. If more cleaning is needed, use a soft-cloth with water.



- For dust build-up, a soft-duster or brush can be gently used.




Location

- Please keep the screen away from direct sunlight, dust and moisture. Avoid using in strong winds.



Tips

The surface of the screen is treated and dried before packaging. If there is any lingering odour, please air out as it will go away.



Caution

- Please contact your local dealer for repairing and replacing. Please contact us if you have any questions. Avoid taking apart the fixture yourself.





Please do not take apart



Description

Illustration

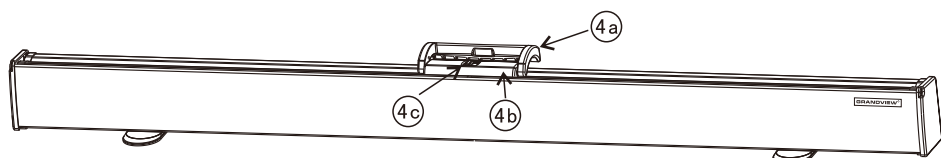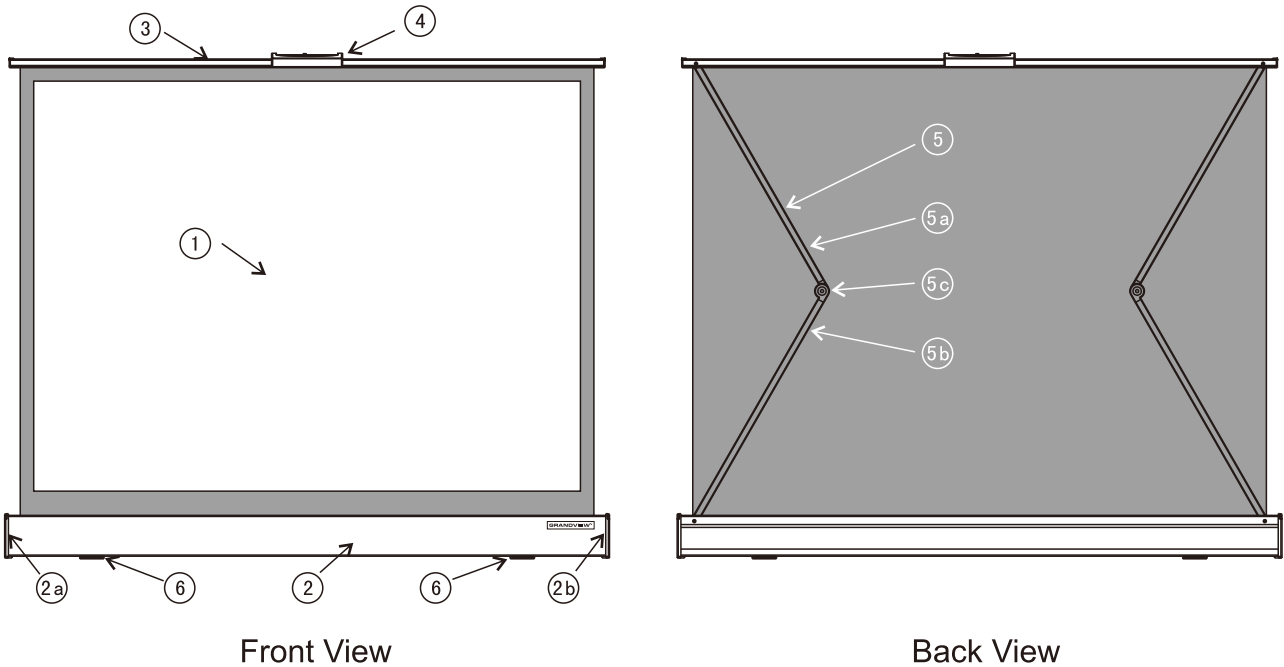


Part name


①	Screen Fabric	④c	Locking Mechanism
②	Casing	⑤	Support Arm
②a	Left End Cap	⑤a	Up Support Arm
②b	Right End Cap	⑤b	Down Support Arm
③	Top Cover/Rod	⑤c	Joint
④	Handle Assembly	⑥	Leg Support
④a	Handle		
④b	Handle Base		

Operation


When using and retracting the screen, please watch your finger to avoid injury.

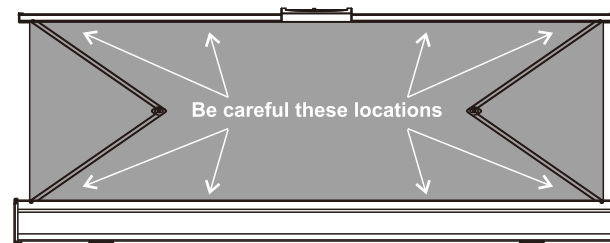

1. Position the screen facing to projector at a suitable distance.





2. Turn the leg support out by 90 degrees




Warning: Please be sure to extent the leg support out when using this screen. Otherwise, the screen will drop down and cause damage.

3. Push the button of locking mechanism to unlock the screen, and pull the screen up.

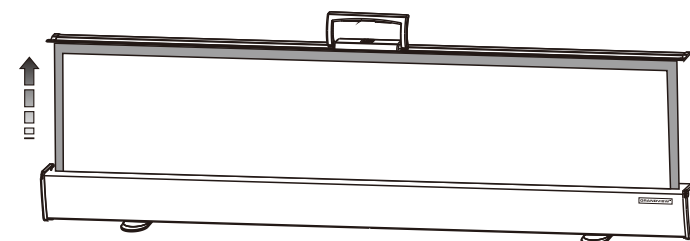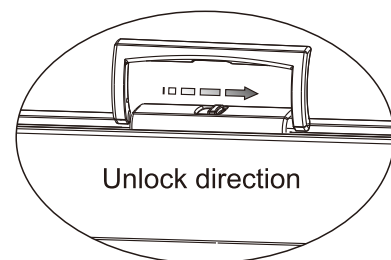


Operation


4. Lift up the handle or push down the handle to set the screen at the desired height

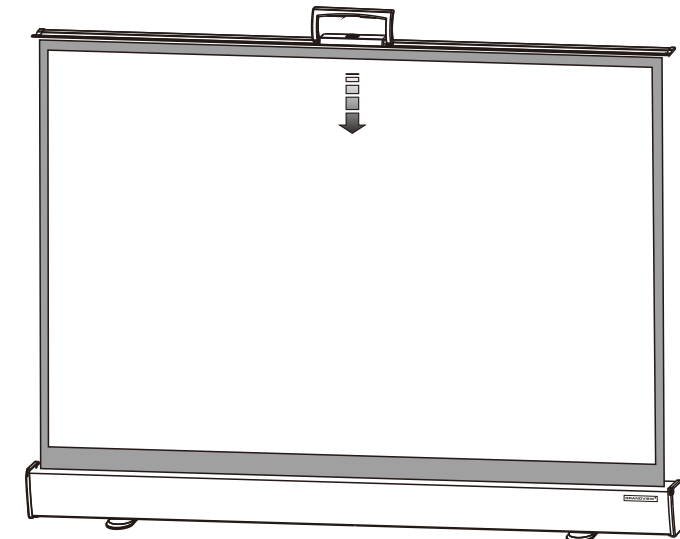


5. When finish using, push down the handle base to retract the screen till the locking mechanism joint together.

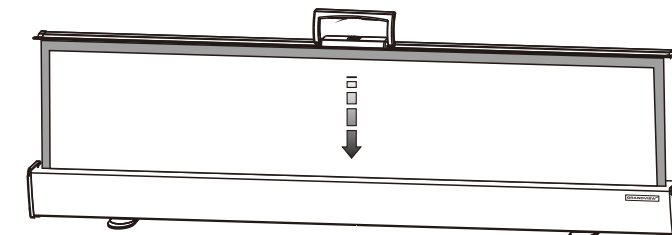

6. Please make sure the screen is well locked by the locking mechanism before lifting.

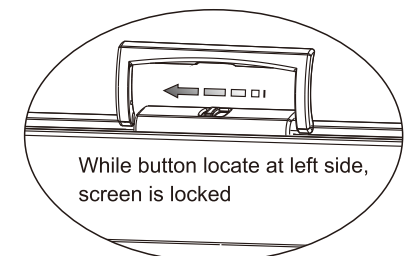

7. Please turn the leg support into the casing before lifting.



Trouble Shooting

In case screen slide down due to the poor support of support arms, please tighten the screens at the support arm joint.